

ELASTICITY AND VISCOSITY

SOLIDS

The materials having a definite shape and volume are known as solids. All solids have the property of elasticity by virtue of which solids behave as incompressible substances and exhibit rigidity and the mechanical strength. Solids are classified into two categories namely Crystalline solids and amorphous solids (or glassy solids).




Figure (a)





Figure (b)

Crystalline Solids : A solid in which atoms or molecules are arranged in a regular three dimensional pattern is known as crystalline solid shown in figure (a) For example : quartz, mica, sugar, copper sulphate, sodium chloride, potassium iodide, cesium chloride, carbon etc.

Amorphous Solids : A solid in which atoms or molecules are not arranged in a regular manner is known as amorphous solid shown in figure (b) For example : talc powder, glass, rubber, plastics etc.

UNIT CELL AND CRYSTAL LATTICE

Unit cell is the building block of a crystal. It is defined as the smallest pattern of atoms in a lattice, the repetition of which in three dimensions forms a crystal lattice.

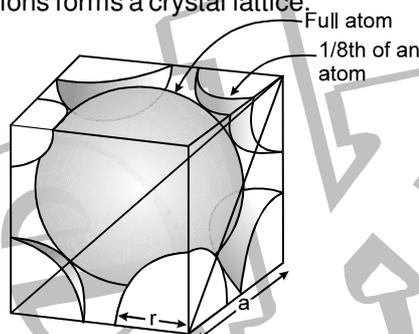

Crystal lattice : It is defined as a regular arrangement of large number of points in space, each point representing the position of an atom or a group of atoms in a crystal. The crystal lattice is shown in a figure.

ELASTICITY AND PLASTICITY

The property of a material body by virtue of which it regains its original configuration (i.e. shape and size) when the external deforming force is removed is called elasticity. The property of the material body by virtue of which it does not regain its original configuration when the external force is removed is called plasticity.

Deforming force : An external force applied to a body which changes its size or shape or both is called deforming force.

Perfectly Elastic body : A body is said to be perfectly elastic if it completely regains its original form when the deforming force is removed. Since no material can regain completely its original form so the concept of perfectly elastic body is only an ideal concept. A quartz fiber is the nearest approach to the perfectly elastic body.

Perfectly Plastic body : A body is said to be perfectly plastic if it does not regain its original form even slightly when the deforming force is removed. Since every material partially regain its original form on the removal of deforming force, so the concept of perfectly plastic body is only an ideal concept. Paraffin wax, wet clay are the nearest approach to a perfectly plastic bodies.

Cause of Elasticity : In a solid, atoms and molecules are arranged in such a way that each molecule is acted upon by the forces due to the neighbouring molecules. These forces are known as intermolecular forces. When no deforming force is applied on the body, each molecule of the solid (i.e. body) is in its equilibrium position and the inter molecular forces between the molecules of the solid are maximum.

On applying the deforming force on the body, the molecules either come closer or go far apart from each other. As a result of this, the molecules are displaced from their equilibrium position. In other words,

Get Solution of These Packages & Learn by Video Tutorials on www.MathsBySuhag.com

intermolecular forces get changed and restoring forces are developed on the molecules. When the deforming force is removed, these restoring forces bring the molecules of the solid to their respective equilibrium positions and hence the solid (or the body) regains its original form.

STRESS

When deforming force is applied on the body then the equal restoring force in opposite direction is developed inside the body. The restoring forces per unit area of the body is called stress.

$$\text{stress} = \frac{\text{restoring force}}{\text{Area of the body}} = \frac{F}{A}$$

The unit of stress is N/m^2 or Nm^{-2} . There are three types of stress


1. Longitudinal or Normal stress

When object is one dimensional then force acting per unit area is called longitudinal stress. It is of two types : (a) compressive stress (b) tensile stress



Examples :

(i) Consider a block of solid as shown in figure. Let a force F be applied to the face which has area A . Resolve \vec{F} into two components :
 $F_n = F \sin \theta$ called normal force and $F_t = F \cos \theta$ called tangential force.



$$\therefore \text{Normal (tensile) stress} = \frac{F_n}{A} = \frac{F \sin \theta}{A}$$


2. Tangential or shear stress

It is defined as the restoring force acting per unit area tangential to the surface of the body. Refer to shown in figure above

$$\text{Tangential (shear) stress} = \frac{F_t}{A} = \frac{F \cos \theta}{A}$$


The effect of stress is to produce distortion or a change in size, volume and shape (i.e. configuration of the body).

3. **Bulk stress or All around stress or Pressure** : When force is acting all along the surface normal to the area, then force acting per unit area is known as pressure. The effect of pressure is to produce volume change. The shape of the body may or may not change depending upon the homogeneity of body.



Illus. 1.


Find out longitudinal stress and tangential stress on a fixed block



Sol. Longitudinal or normal stress $\Rightarrow \sigma_l = \frac{100 \sin 30^\circ}{5 \times 2} = 5 \text{ N/m}^2$
 Tangential stress $\Rightarrow \sigma_t = \frac{100 \cos 30^\circ}{5 \times 2} = 5\sqrt{3} \text{ N/m}^2$

Illus. 2.

Find out Bulk stress on the spherical object of radius $\frac{10}{\pi}$ cm if area and mass of piston is 50 cm^2 and 50 kg respectively for a cylinder filled with gas.

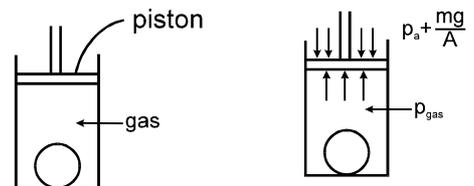


Sol.

$$p_{\text{gas}} = \frac{mg}{A} + p_a = \frac{50 \times 10}{50 \times 10^{-4}} + 1 \times 10^5 = 2 \times 10^5 \text{ N/m}^2$$



$$\text{Bulk stress} = p_{\text{gas}} = 2 \times 10^5 \text{ N/m}^2$$

Illus. 3.

What will be the shape of column so that stresses at each level of column are same due to weight & applied stress, 'ρ' is density of material.

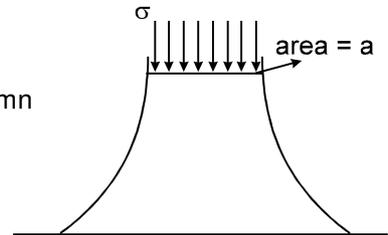

Sol. Consider element of thickness 'dx' at depth 'x' from top.

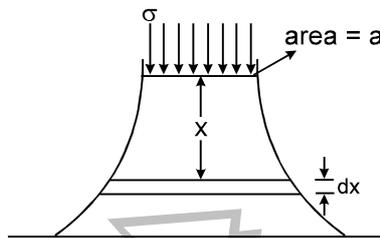

Let top area of element is 'A' while bottom is $A + dA$
Equation of forces :

$$\sigma A + \rho A g dx = \sigma (A + dA)$$

$$\rho A g dx = \sigma \cdot dA$$

$$\int_{\sigma}^x \frac{\rho g}{\sigma} dx = \int_a^A \frac{dA}{A}$$

$$\frac{\rho g}{\sigma} x = \ln \frac{A}{a} \Rightarrow$$

$$A = a e^{\frac{\rho g}{\sigma} x}$$

thus area at any depth 'x' $A = a e^{\frac{\rho g}{\sigma} x}$

STRAIN

The ratio of the change in configuration (i.e. shape, length or volume) to the original configuration of the body is called strain

i.e.
$$\text{Strain, } \epsilon = \frac{\text{change in configuration}}{\text{original configuration}}$$

It has no unit

Types of strain : There are three types of strain

(i) Longitudinal strain : This type of strain is produced when the deforming force causes a change in length of the body. It is defined as the ratio of the change in length to the original length of the body.


Consider a wire of length L : When the wire is stretched by a force F, then let the change in length of the wire is ΔL shown in the figure.

\therefore Longitudinal strain ,
$$\epsilon_l = \frac{\text{change in length}}{\text{original length}} \quad \text{or} \quad \text{Longitudinal strain} = \frac{\Delta L}{L}$$



(ii) Volume strain : This type of strain is produced when the deforming force produces a change in volume of the body shown in the figure. It is defined as the ratio of the change in volume to the original volume of the body.

If $\Delta V = \text{change in volume}$ $V = \text{original volume}$

$$\epsilon_v = \text{volume strain} = \frac{\Delta V}{V}$$



(iii) Shear Strain : This type of strain is produced when the deforming force causes a change in the shape of the body. It is defined as the angle (θ) through which a face originally perpendicular to the fixed face is turned as shown in the figure.



$$\tan \phi \text{ or } \phi = \frac{x}{l}$$

HOOKE'S LAW AND MODULUS OF ELASTICITY

According to this law, within the elastic limit, stress is proportional to the strain.

i.e. stress \propto strain

or stress = constant \times strain or $\frac{\text{stress}}{\text{strain}} = \text{Modulus of Elasticity.}$

This constant is called modulus of elasticity.

Thus, modulus of elasticity is defined as the ratio of the stress to the strain.

Modulus of elasticity depends on the nature of the material of the body and is independent of its dimensions (i.e. length, volume etc.).

Unit : The SI unit of modulus of elasticity is Nm^{-2} or Pascal (Pa).

TYPES OF MODULUS OF ELASTICITY

Corresponding to the three types of strain there are three types of modulus of elasticity.

1. Young's modulus of elasticity (Y)
2. Bulk modulus of elasticity (K)
3. Modulus of rigidity (η).


1. Young's modulus of elasticity

It is defined as the ratio of the normal stress to the longitudinal strain.

i.e. Young's modulus (Y) = $\frac{\text{Longitudinal stress}}{\text{Longitudinal strain}}$


Normal stress = F/A ,
Longitudinal strain = $\Delta L/L$

$$Y = \frac{F/A}{\Delta L/L} = \frac{FL}{A\Delta L}$$



Illus. 4.

Find out the shift in point B, C and D

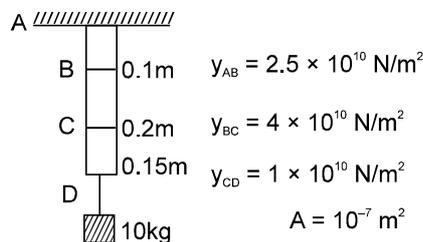

Sol. $\Delta L_B = \Delta L_{AB} = \frac{FL}{AY} = \frac{MgL}{AY} = \frac{10 \times 10 \times 0.1}{10^{-7} \times 2.5 \times 10^{10}} = 4 \times 10^{-3} \text{ m} = 4 \text{ mm}$

$$\Delta L_C = \Delta L_B + \Delta L_{BC} = 4 \times 10^{-3} + \frac{100 \times 0.2}{10^{-7} \times 4 \times 10^{10}} = 4 \times 10^{-3} + 5 \times 10^{-3} = 9 \text{ mm}$$

$$\Delta L_D = \Delta L_C + \Delta L_{CD} = 9 \times 10^{-3} + \frac{100 \times 0.15}{10^{-7} \times 1 \times 10^{10}} = 9 \times 10^{-3} + 15 \times 10^{-3} = 24 \text{ mm}$$

ELONGATION OF ROD UNDER IT'S SELF WEIGHT


Let rod is having self weight 'W', area of cross-section 'A' and length 'L'. Considering on element at a distance 'x' from bottom.

then $T = \frac{W}{L} x$

elongation in 'dx' element = $\frac{T \cdot dx}{Ay}$


Total elongation $s = \int_0^L \frac{T dx}{Ay} = \int_0^L \frac{W x dy}{LAy} = \frac{WL}{2Ay}$

Note : One can do directly by considering total weight at C.M. and using effective length $\ell/2$.

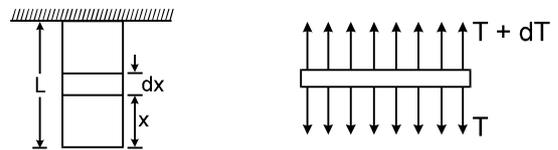

Illus. 5.

Will the elongation be same in above two rods of same geometry and same weight

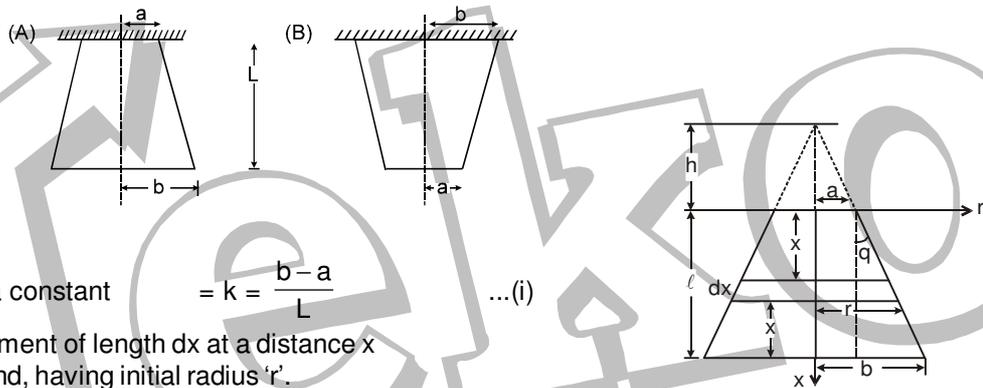

Sol.. Yes it is same

$$\Rightarrow \frac{dr}{dx} = \text{a constant} = k = \frac{b-a}{L} \dots(i)$$

Consider an element of length dx at a distance x from the fixed end, having initial radius 'r'.

Let 'dδ' the extension in the length of this element due to weight W of the body.

Now $y = \frac{Mg dx}{\pi r^2 d\delta}$ $d\delta = \frac{Mg dx}{\pi r^2 y}$

from (i) $\delta = \int_a^b d\delta = \int_a^b \frac{Mg dr}{\pi k y r^2}$ on solving $\delta = \frac{MgL}{\pi y ab}$

Ques. Solve the above problem for case (B)


Illus. 6.


Given $y = 2 \times 10^{11} \text{ N/m}^2$ \Rightarrow $\rho = 10^4 \text{ kg/m}^3$
Find out elongation in rod.

Sol. mass of shaded portion

$m' = \frac{m}{\ell} (\ell - x)$ [where m = total mass = $\rho A \ell$]

$T = m' w^2 \left[\frac{\ell - x}{2} + x \right]$ \Rightarrow $T = \frac{m}{\ell} (1-x) w^2 \left(\frac{\ell + x}{2} \right)$ $T = \frac{mw^2}{2\ell} (\ell^2 - x^2)$

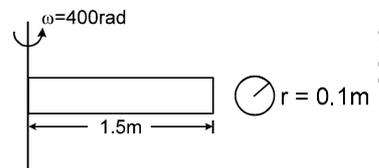

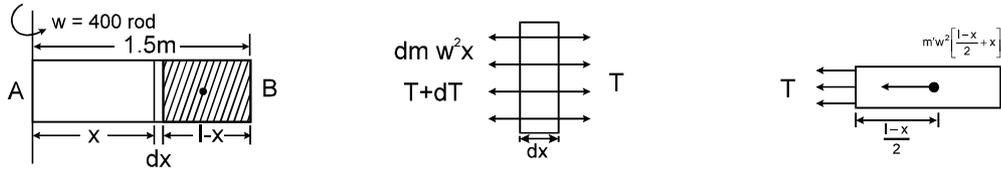

this tension will be maximum at A $\left(\frac{mw^2\ell}{2}\right)$ and minimum at 'B' (zero), elongation in element of width 'dx' = $\frac{Tdx}{Ay}$


Total elongation

$$\delta = \int \frac{Tdx}{Ay} = \int_0^\ell \frac{mw^2(\ell^2 - x^2)}{2\ell Ay} dx$$



$$\delta = \frac{mw^2}{2\ell Ay} \left[\ell^2 x - \frac{x^3}{3} \right]_0^\ell = \frac{mw^2 \times 2\ell^3}{2\ell Ay \times 3} = \frac{mw^2\ell^2}{3Ay} = \frac{\rho A \ell w^2 \ell^2}{3Ay}$$

$$\delta = \frac{\rho w^2 \ell^3}{3y} = \frac{10^4 \times (400) \times (1.5)^3}{3 \times 2 \times 10^{11}} = 9 \times 10^{-3} \text{ m} = 9 \text{ mm}$$

Illus. 7. Find out the elongation in block. If mass, area of cross-section and young modulus of block are m, A and y respectively.



Sol.



Acceleration, $a = \frac{F}{m}$

then $T = m'a$ where $\Rightarrow m' = \frac{m}{\ell} x$

$$T = \frac{m}{\ell} x \times \frac{F}{m} = \frac{Fx}{\ell}$$

Elongation in element 'dx' = $\frac{Tdx}{Ay}$

total elongation, $\delta = \int_0^\ell \frac{Tdx}{Ay} = \int_0^\ell \frac{Fxdx}{Aly} = \frac{F\ell}{2Ay}$

Note :-


Try this problem, if friction is given between block and surface (μ = friction coefficient), and

- Case :** (I) $F < \mu mg$
 (II) $F > \mu mg$

Ans. In both cases answer will be $\frac{F\ell}{2Ay}$

Illus. 8.

In a ring having linear charge density ' λ ', made up of wire of cross-section area 'a', young modulus y, a charge Q_0 is placed at it's centre. If initial radius is 'R', then find out change in radius



Sol. Considering an element of angular width '2θ' -

$$dq = \lambda R' \cdot 2\theta \Rightarrow F = 2T \sin \theta$$

$$\frac{k dq \cdot Q_0}{R'^2} = 2T \sin \theta \Rightarrow \frac{k \lambda R' \times 2\theta \cdot Q_0}{R'^2} = 2T \sin \theta$$

if θ is small, then sin θ = θ

further, $\frac{k \lambda Q_0}{R'} = T$

But $y = \frac{\text{stress}}{\text{strain}}$, strain = $\frac{2\pi(R' - R)}{2\pi R} = \frac{R' - R}{R}$

$$y = \frac{T}{a(R' - R)} \Rightarrow R' - R = \frac{k \lambda Q_0}{R' a y}$$


$$R'^2 - RR' - \alpha = 0 \Rightarrow \left[\alpha = \frac{k \lambda Q_0}{a y} \right]$$

$$R' = \frac{R \pm \sqrt{R^2 + 4\alpha}}{2} \quad [(-) \text{ is only when charge is of opposite nature}]$$

then $R' = \frac{R}{2} \left[1 + \left[1 + \frac{4\alpha}{R^2} \right]^{1/2} \right] \Rightarrow R' = \left[1 + 1 + \frac{2\alpha}{R^2} \right] \frac{R}{2}$ [neglecting higher term.]

$$R' = R + \frac{\alpha}{R}$$

change in radius $\Delta R = R' - R = \frac{\alpha}{R} = \frac{k \lambda Q_0}{a y R} = \frac{\lambda Q_0}{4\pi \epsilon_0 a y R}$

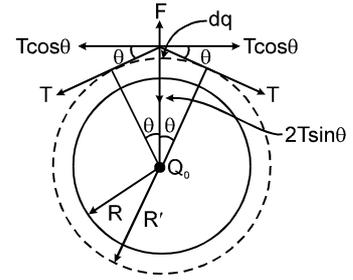

2. Bulk modulus :

It is defined as the ratio of the normal stress to the volume strain

i.e. $K = \frac{\text{Pressure}}{\text{Volume strain}}$

The stress being the normal force applied per unit area and is equal to the pressure applied (p).

$$K = \frac{p}{-\frac{\Delta V}{V}} = -\frac{pV}{\Delta V}$$

Negative sign shows that increase in pressure (p) causes decrease in volume (ΔV).

Compressibility : The reciprocal of bulk modulus of elasticity is called compressibility. Unit of compressibility in SI is N⁻¹ m² or pascal⁻¹ (Pa⁻¹).

Bulk modulus of solids is about fifty times that of liquids, and for gases it is 10⁻⁸ times of solids.

$$K_{\text{solids}} > K_{\text{liquids}} > K_{\text{gases}}$$

Isothermal modulus of elasticity of gas K = P (pressure of gas)

Adiabatic modulus of elasticity of gas K = γ × P where $\gamma = \frac{C_p}{C_v}$.


Illus. 9.

Find the depth of lake at which density of water is 1% greater than at the surface. Given compressibility k = 50 × 10⁻⁶ / atm.

Sol.

$$B = \frac{\Delta p}{-\frac{\Delta V}{V}} \quad \frac{\Delta V}{V} = -\frac{\Delta p}{B}$$

We know $p = p_{\text{atm}} + h\rho g$
 or $m = \rho V = \text{const.}$
 $d\rho \cdot v + \rho \cdot dv = 0$



$$\begin{aligned} dp V + dV \cdot \rho &= 0 \Rightarrow \frac{dp}{\rho} = -\frac{dV}{V} \\ \text{i.e. } \frac{\Delta p}{\rho} &= \frac{\Delta p}{B} \Rightarrow \frac{\Delta p}{\rho} = \frac{1}{100} \\ \frac{1}{100} &= \frac{h\rho g}{B} \quad [\text{assuming } \rho = \text{const.}] \\ h\rho g &= \frac{B}{100} = \frac{1}{100} \text{ k} \Rightarrow h\rho g = \frac{1 \times 1 \times 10^5}{100 \times 50 \times 10^{-6}} \\ h &= \frac{10^5}{5000 \times 10^{-6} \times 1000 \times 10} = \frac{100 \times 10^3}{50} = 2 \text{ km} \quad \text{Ans.} \end{aligned}$$

3. Modulus of Rigidity :


It is defined as the ratio of the tangential stress to the shear strain. Let us consider a cube whose lower face is fixed and a tangential force F acts on the upper face whose area is A .

\therefore Tangential stress = F/A .

Let the vertical sides of the cube shifts through an angle θ , called shear strain

\therefore Modulus of rigidity is given by $\eta = \frac{\text{Tangential stress}}{\text{Shear strain}}$

$$\text{or } \eta = \frac{F/A}{\phi} = \frac{F}{A\phi}$$




Illus. 10.

A rubber cube of side 5 cm has one side fixed while a tangential force equal to 1800 N is applied to opposite face find the shearing strain and the lateral displacement of the strained face. Modulus of rigidity for rubber is $2.4 \times 10^6 \text{ N/m}^2$.

Sol. $L = 5 \times 10^{-2} \text{ m} \Rightarrow \frac{F}{A} = \eta \frac{x}{L}$

$$\text{strain } \theta = \frac{F}{A\eta} = \frac{1800}{25 \times 10^{-4} \times 2.4 \times 10^6} = \frac{180}{25 \times 24} = \frac{3}{10} = 0.3 \text{ radian}$$

$$\frac{x}{L} = 0.3 \Rightarrow x = 0.3 \times 5 \times 10^{-2} = 1.5 \times 10^{-2} \text{ m} = 1.5 \text{ mm} \quad \text{Ans.}$$



POISSON'S RATIO (NOT IN JEE SYLLABUS)

When a long bar is stretched by a force along its length, then its length increases and the diameter decreases as shown in figure. The ratio of change in diameter (ΔD) to the original diameter (D_i) is called **lateral strain**. The ratio of change in length ($\Delta \ell$) to the original length (ℓ) is called **longitudinal strain**.


The ratio of lateral strain to the longitudinal strain is called Poisson's ratio (σ).

$$\text{i.e. } \sigma = \frac{\text{Lateral strain}}{\text{Longitudinal strain}} = \frac{-\Delta D/D_i}{\Delta \ell/\ell} = \frac{-\ell}{D_i} \cdot \frac{\Delta D}{\Delta \ell}$$

It is dimensionless quantity and has no unit.

Important Points :

Theoretical value of σ lies between -1 and 0.5. In actual practice, it is never negative and its practical value lies between 0 and 0.5.

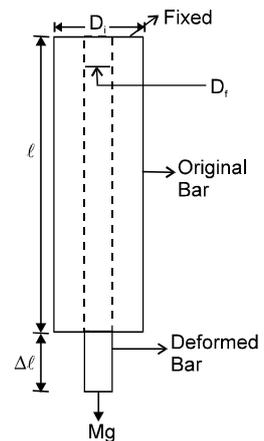

RELATIONS AMONGST VARIOUS ELASTIC CONSTANTS

(a) $Y = 3K(1 - 2\sigma)$

(b) $Y = 2\eta(1 + \sigma)$


(c) $Y = \left(\frac{9\eta K}{\eta + 3k} \right)$

VARIATION OF STRAIN WITH STRESS

When a wire is stretched by a load, it is seen that for small value of load, the extension produced in the wire is proportional to the load. On removing the load, the wire returns to its original length. The wire regains its original dimensions only when load applied is less or equal to a certain limit. This limit is called elastic limit. Thus, elastic limit is the maximum stress on whose removal, the bodies regain their original dimensions. In shown figure, this type of behavior is represented by OA portion of the graph. As we increase the stress

Get Solution of These Packages & Learn by Video Tutorials on www.MathsBySuhag.com

further, a point B is reached where the increase in strain is proportional to the stress. On reaching the point B, we remove the stress, then the wire does not regain its original dimension.



- OA → Elastic limit
- OB → Limit of Proportionality
- C → Yield Point
- CD → Plastic behaviour
- D → Ultimate point
- DE → Fracture

As we go beyond the point B, then even for a very small increase in stress, the strain produced is very large. This type of behaviour is observed around point C and at this stage the wire begins to flow like a viscous fluid. The point C is called yield point. If the stress is further increased, then the wire breaks off at a point D called the breaking point. The stress corresponding to this point is called breaking stress or tensile strength of the material of the wire. A material for which the plastic range CD is relatively high is called ductile material. These materials get permanently deformed before breaking. The materials for which plastic range is relatively small are called brittle materials. These materials break as soon as elastic limit is crossed.

Important points

1. Breaking stress = Breaking force/area of cross section.
2. Breaking stress is constant for a material
3. Breaking force depends upon the area of the section of the wire of a given material.
4. The working stress is always kept lower than that of a breaking stress so that safety factor = breaking stress/working stress may have a large value.
5. Breaking strain = elongation or compression/original dimension.
6. Breaking strain is constant for material.

Elastic after effect

We know that some material bodies take some time to regain their original configuration when the deforming force is removed. The delay in regaining the original configuration by the bodies on the removal of deforming force is called elastic after effect. The elastic after effect is negligibly small for quartz fibre and phosphor bronze. For this reason, the suspensions made from quartz and phosphor-bronze are used in galvanometers and electrometers.

For glass fibre elastic after effect is very large. It takes hours for glass fibre to return to its original state on removal of deforming force.

Elastic Fatigue

The loss of strength of the material due to repeated strains on the material is called elastic fatigue. That is why bridges are declared unsafe after a long time of their use.

Analogy of Rod as a spring






$$y = \frac{\text{stress}}{\text{strain}} \Rightarrow y = \frac{F\ell}{A\Delta\ell}$$

or $F = \frac{Ay}{\ell} \Delta\ell$


$\frac{Ay}{\ell}$ = constant, depends on type of material and geometry of rod.

$$F = k\Delta\ell$$

where $k = \frac{Ay}{\ell}$ = equivalent spring constant.




Get Solution of These Packages & Learn by Video Tutorials on www.MathsBySuhag.com for the system of rods shown in figure (a), the replaced spring system is shown in figure (b) two spring in series]. Figure (c) represents equivalent spring system. Figure (d) represents another combination of rods and their replaced spring system.

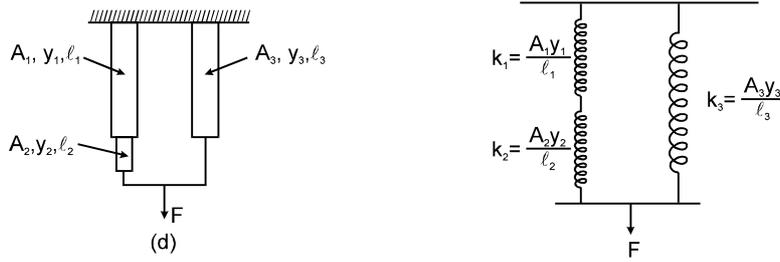

Illus. 11.

A mass 'm' is attached with rods as shown in figure. This mass is slightly stretched and released whether the motion of mass is S.H.M., if yes then find out the time period.

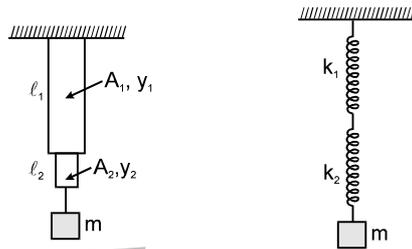

Sol. $k_{eq} = \frac{k_1 k_2}{k_1 + k_2}$ $T = 2\pi \sqrt{\frac{m}{k_{eq}}} = 2\pi \sqrt{\frac{m(k_1 + k_2)}{k_1 k_2}}$

where $k_1 = \frac{A_1 y_1}{\ell_1}$ and $k_2 = \frac{A_2 y_2}{\ell_2}$


ELASTIC POTENTIAL ENERGY STORED IN A STRETCHED WIRE OR IN A ROD

Strain energy stored in equivalent spring

$$U = \frac{1}{2} kx^2$$

where $x = \frac{F\ell}{Ay}$, $k = \frac{Ay}{\ell}$

$$U = \frac{1}{2} \frac{Ay}{\ell} \frac{F^2 \ell^2}{A^2 y^2} = \frac{1}{2} \frac{F^2 \ell}{Ay}$$



equation can be re-arranged

$$U = \frac{1}{2} \frac{F^2}{A^2} \times \frac{\ell A}{y} \quad [\ell A = \text{volume of rod, } F/A = \text{stress}]$$

$$U = \frac{1}{2} \frac{(\text{stress})^2}{y} \times \text{volume}$$

again, $U = \frac{1}{2} \frac{F}{A} \times \frac{F}{Ay} \times A \ell \quad [\text{Strain} = \frac{F}{Ay}]$

$$U = \frac{1}{2} \text{stress} \times \text{strain} \times \text{volume}$$


again, $U = \frac{1}{2} \frac{F^2}{A^2 y^2} A \ell y$

$$U = \frac{1}{2} y (\text{strain})^2 \times \text{volume}$$

$$\text{strain energy density} = \frac{\text{strain energy}}{\text{volume}} = \frac{1}{2} \frac{(\text{stress})^2}{y} = \frac{1}{2} y (\text{strain})^2 = \frac{1}{2} \text{stress} \times \text{strain}$$

Illus. 12.

Hanger is mass-less A ball of mass 'm' drops from a height 'h', which sticks to hanger after striking. Neglect over turning, find out the maximum extension in rod. Assuming rod is massless.




Sol. Applying energy conservation

$$mg(h + x) = \frac{1}{2} \frac{k_1 k_2}{k_1 + k_2} x^2$$

where $k_1 = \frac{A_1 y_1}{l_1}$ $k_2 = \frac{A_2 y_2}{l_2}$

& $K_{eq} = \frac{A_1 A_2 y_1 y_2}{A_1 y_1 l_2 + A_2 y_2 l_1}$

$$k_{eq} x^2 - 2mgx - 2mgh = 0$$



$$x = \frac{2mg \pm \sqrt{4m^2 g^2 + 8mgh k_{eq}}}{2k_{eq}}$$

$$x_{max} = \frac{mg}{k_{eq}} + \sqrt{\frac{m^2 g^2}{k_{eq}^2} + \frac{2mgh}{k_{eq}}}$$

OTHERWAY BY S.H.M.

$$w = \sqrt{\frac{k_{eq}}{m}}$$


$$v = \omega \sqrt{a^2 - y^2}$$

$$\sqrt{2gh} = \sqrt{\frac{k_{eq}}{m}} \sqrt{a^2 - y^2} \Rightarrow$$


$$\sqrt{\frac{2mgh}{k_{eq}} + \frac{m^2 g^2}{k_{eq}^2}} = a$$

max^m extension

$$= a + y = \frac{mg}{k_{eq}} + \sqrt{\frac{m^2 g^2}{k_{eq}^2} + \frac{2mgh}{k_{eq}}}$$



THERMAL STRESS :




If temp of rod is increased by ΔT , then change in length

$$\Delta l = l \alpha \Delta T$$

$$\text{strain} = \frac{\Delta l}{l} = \alpha \Delta T$$


But due to rigid support, there is no strain. Supports provide force on stresses to keep the length of rod same

$$y = \frac{\text{stress}}{\text{strain}}$$



If $\Delta T = (+)$ tive

$$\text{thermal stress} = y \text{ strain} = y \alpha \Delta T$$




if $\Delta T = (-)$ tive

$$\frac{F}{A} = y \alpha \Delta T$$

$$F = Ay \alpha \Delta T$$

Illus. 13.

When composite rod is free, then composite length increases to 2.002 m for temp 20°C to 120°C. When composite rod is fixed between the support, there is no change in component length find y and α of steel,



if $y_{cu} = 1.5 \times 10^{13} \text{ N/m}^2$ $\alpha_{cu} = 1.6 \times 10^{-5}/^\circ\text{C}$.

Sol.

$$\Delta l = l_s \alpha_s \Delta T + l_c \alpha_c \Delta T$$

$$.002 = [1.5 \alpha_s + 0.5 \times 1.6 \times 10^{-5}] \times 100$$

$$\alpha_s = \frac{1.2 \times 10^{-5}}{1.5} = 8 \times 10^{-6}/^\circ\text{C}$$

there is no change in component length
For steel

$$x = l_s \alpha_s \Delta T - \frac{F l_s}{A Y_s} = 0$$

$$\frac{F}{A Y_s} = \alpha_s \Delta T \quad \dots(A)$$

for copper

$$x = \frac{F l_c}{A y_c} - l_c \alpha_c \Delta T = 0$$




$$\frac{F}{A y_c} = \alpha_c \Delta T \quad \dots(B)$$

$$B/A \Rightarrow \frac{y_s}{y_c} = \frac{\alpha_c}{\alpha_s}$$

$$y_s = y_c \frac{\alpha_c}{\alpha_s} = \frac{1.5 \times 10^{13} \times 1.6 \times 10^{-5}}{8 \times 10^{-6}}$$

$$y_s = 3 \times 10^{13} \text{ N/m}^2$$

Final position of junction Initial position of junction

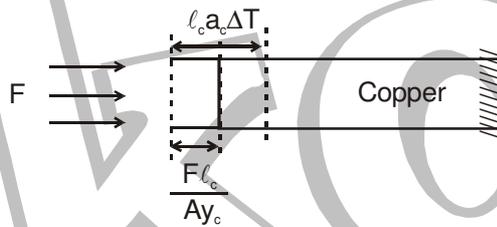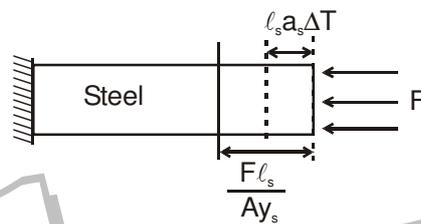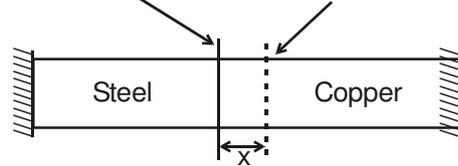

APPLICATIONS OF ELASTICITY

Some of the important applications of the elasticity of the materials are discussed as follows :

1. The material used in bridges lose its elastic strength with time bridges are declared unsafe after long use.
2. **To estimate the maximum height of a mountain :**
The pressure at the base of the mountain = $h\rho g$ = stress. The elastic limit of a typical rock is $3 \times 10^8 \text{ N m}^{-2}$
The stress must be less than the elastic limits, otherwise the rock begins to flow.

$$h < \frac{3 \times 10^8}{\rho g} < \frac{3 \times 10^8}{3 \times 10^3 \times 10} < 10^4 \text{ m } (\because \rho = 3 \times 10^3 \text{ kg m}^{-3} ; g = 10 \text{ ms}^{-2}) \quad \text{or} \quad h = 10 \text{ km}$$

It may be noted that the height of Mount Everest is nearly 9 km.

INTER-ATOMIC FORCE-CONSTANT

The inter atomic force F' developed between the atoms is directly proportional to the change in distance Δr between them

$$F' = k \Delta r, \quad \dots\dots\dots(i)$$

where k is interatomic force-constant. Let L be the length of a wire and r_0 the normal distance between the atoms of the wire. Suppose, when a force F is applied, the length of the wire increases by l , and the distance between its atoms increases from r_0 to $r_0 + \Delta r$. Then

$$\text{longitudinal strain} = \frac{l}{L} = \frac{\Delta r}{r_0} . \quad \dots\dots\dots(ii)$$

If A be the area of cross-section of the wire, it will have A/r_0^2 chains of atoms. Therefore, the inter atomic force (force acting on chain) is

$$F' = \frac{\text{external force}}{\text{number of chains}} = \frac{F}{A/r_0^2} = \frac{Fr_0^2}{A}$$


inter atomic force-constant is -

$$k = \frac{F'}{\Delta r} = \frac{Fr_0^2/A}{\Delta r} = \frac{F}{A} \frac{r_0}{\Delta r} r_0 \dots\dots\dots \text{by equation (i)}$$

$$\text{But } r_0/\Delta r = L/l, k = \frac{F}{A} \frac{L}{\ell} r_0 = \frac{F/A}{\ell/L} r_0 \dots\dots\dots \text{by equation (ii).}$$

$$\text{But, by definition, } \frac{F/A}{\ell/L} = Y \text{ (Young's modulus of the material of the wire)} \Rightarrow k = Yr_0.$$

Thus, inter-atomic force-constant k is equal to the product of Young's modulus of the material of the wire and the normal distance r_0 between the atoms of the wire.

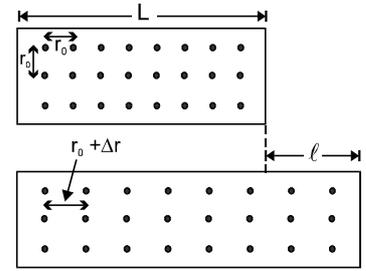

Illus. 14.

For steel rod
 young modulus = 2×10^{11} N/m²
 Inter atomic spacing = 2.0 \AA
 Find (a) Inter atomic force constant (N/Å)
 (b) Increase in inter atomic spacing for a stress of 2×10^9 N/m²

Sol. (a) $k = yr_0 = 2 \times 10^{11} \times 2 \times 10^{-10} = 40 \text{ N/m} = \frac{40}{10^{10} \text{ \AA}^0} = 4 \times 10^{-9} \text{ N/Å}$

(b) $\Delta r = \frac{F}{k}$
 where $F = \text{stress} \times r_0^2$
 $= 2 \times 10^9 \times (3 \times 10^{-10})^2$
 $= 18 \times 10^{-11} \text{ N}$
 $\Delta r = \frac{18 \times 10^{-11}}{4 \times 10^{-9}} = 4.5 \times 10^{-2} \text{ \AA} = .045 \text{ \AA} \text{ Ans.}$

TORSION CONSTANT OF A WIRE

$$C = \frac{\pi \eta r^4}{2\ell} \text{ Where } \eta \text{ is modulus of rigidity } r \text{ and } \ell \text{ is radius and length of wire respectively.}$$

(a) Torque required for twisting by angle θ , $\tau = C\theta$.

(b) Work done in twisting by angle θ , $W = \frac{1}{2} C\theta^2$.

VISCOSITY

When a solid body slides over another solid body, a frictional-force begins to act between them. This force opposes the relative motion of the bodies. Similarly, when a layer of a liquid slides over another layer of the same liquid, a frictional-force acts between them which opposes the relative motion between the layers. This force is called 'internal frictional-force'.

Suppose a liquid is flowing in streamlined motion on a fixed horizontal surface AB (Fig.). The layer of the liquid which is in contact with the surface is at rest, while the velocity of other layers increases with distance from the fixed surface. In the Fig., the lengths of the arrows represent the increasing velocity of the layers. Thus there is a relative motion between adjacent layers of the liquid. Let us consider three parallel layers a, b and c. Their velocities are in the increasing order. The layer a tends to retard the layer b, while b tends to retard c. Thus each layer tends to decrease the velocity of the layer above it. Similarly, each layer tends to increase the velocity of the layer below it. This means that in between any two layers of the liquid, internal tangential forces act which try to destroy the relative motion between the layers. These forces are called 'viscous forces'. If the flow of the liquid is to be maintained, an external force must be applied to overcome the dragging viscous forces. In the absence of the external force, the viscous forces would soon bring the liquid to rest. **The property of the liquid by virtue of which it opposes the relative motion between its adjacent layers is known as 'viscosity'.**

SIMILARITIES AND DIFFERENCES BETWEEN VISCOSITY AND SOLID FRICTION

Similarities

Viscosity and solid friction are similar as

- Both oppose relative motion. Whereas viscosity opposes the relative motion between two adjacent liquid layers, solid friction opposes the relative motion between two solid layers.
- Both come into play, whenever there is relative motion between layers of liquid or solid surfaces as the case may be.
- Both are due to molecular attractions.

Differences between them →

	Viscosity	Solid Friction
(i)	Viscosity (or viscous drag) between layers of liquid is directly proportional to the area of the liquid layers.	(i) Friction between two solids is independent of the area of solid surfaces in contact.
(ii)	Viscous drag is proportional to the relative velocity between two layers of liquid.	(ii) Friction is independent of the relative velocity between two surfaces.
(iii)	Viscous drag is independent of normal reaction between two layers of liquid.	(iii) Friction is directly proportional to the normal reaction between two surfaces in contact.

SOME APPLICATIONS OF VISCOSITY

Knowledge of viscosity of various liquids and gases have been put to use in daily life. Some applications of its knowledge are discussed as under →

- As the viscosity of liquids vary with temperature, proper choice of lubricant is made depending upon season.
- Liquids of high viscosity are used in shock absorbers and buffers at railway stations.
- The phenomenon of viscosity of air and liquid is used to damp the motion of some instruments.
- The knowledge of the coefficient of viscosity of organic liquids is used in determining the molecular weight and shape of the organic molecules.
- It finds an important use in the circulation of blood through arteries and veins of human body.

UNITS OF COEFFICIENT OF VISCOSITY

From the above formula, we have $\eta = \frac{F}{A(\Delta v_x / \Delta z)}$

$$\therefore \text{ dimensions of } \eta = \frac{[MLT^{-2}]}{[L^2][LT^{-1}/L]} = \frac{[MLT^{-2}]}{[L^2T^{-1}]} = [ML^{-1}T^{-1}]$$

Its unit is kg/(meter-second)*

In C.G.S. system, the unit of coefficient of viscosity is dyne s cm⁻² and is called poise. In SI the unit of coefficient of viscosity is N sm⁻² and is called decapoise.

1 decapoise = 1 N sm⁻² = (10⁵ dyne) × s × (10² cm)⁻² = 10 dyne s cm⁻² = 10 poise

Illus. 15.

A man is rowing a boat with a constant velocity 'v₀' in a river the contact area of boat is 'A' and coefficient of viscosity is η. The depth of river is 'D'. Find the force required to row the boat.

Sol.


$$F - F_T = m a_{res}$$

As boat moves with constant velocity a_{res} = 0

$$F = F_T$$


$$\text{But } F_T = \eta A \frac{dv}{dz}, \text{ but } \frac{dv}{dz} = \frac{v_0 - 0}{D} = \frac{v_0}{D}$$

$$\text{then } F = F_T = \frac{\eta A v_0}{D}$$



Illus. 16.

A cubical block (of side 2m) of mass 20 kg slides on inclined plane lubricated with the oil of viscosity $\eta = 10^{-1}$ poise with constant velocity of 10 m/sec. ($g = 10 \text{ m/sec}^2$) find out the thickness of layer of liquid.




Sol. $F = F' = \eta A \frac{dv}{dz} = mg \sin \theta \quad \frac{dv}{dz} = \frac{v}{h}$

$$20 \times 10 \times \sin 30^\circ = \eta \times 4 \times \frac{10}{h}$$




$$h = \frac{40 \times 10^{-2}}{100} \quad [\eta = 10^{-1} \text{ poise} = 10^{-2} \text{ N-sec-m}^{-2}]$$

$$= 4 \times 10^{-3} \text{ m} = 4 \text{ mm}$$



Illus. 17.

As per the shown figure the central solid cylinder starts with initial angular velocity ω_0 . Find out the time after which the angular velocity becomes half.

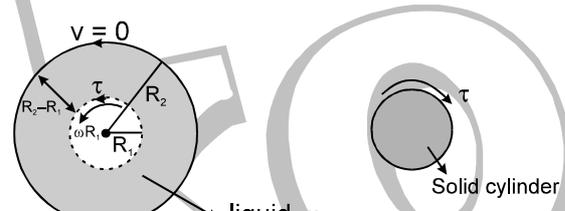

Sol. $F = \eta A \frac{dv}{dz}$, where $\frac{dv}{dz} = \frac{\omega R_1 - 0}{R_2 - R_1}$

$$F = \eta \frac{2\pi R_1 \ell \omega R_1}{R_2 - R_1}$$

and $\tau = FR_1 = \frac{2\pi \eta R_1^3 \omega \ell}{R_2 - R_1}$

$$I \alpha = \frac{2\pi \eta R_1^3 \omega \ell}{R_2 - R_1} \Rightarrow \frac{MR_1^2}{2} \left(-\frac{d\omega}{dt} \right) = \frac{2\pi \eta R_1^3 \omega \ell}{R_2 - R_1}$$

or $-\int_{\omega_0}^{\omega_0/2} \frac{d\omega}{\omega} = \frac{4\pi \eta R_1 \ell}{m(R_2 - R_1)} \int_0^t dt \Rightarrow t = \frac{m(R_2 - R_1) \ln 2}{4\pi \eta \ell R_1}$

EFFECT OF TEMPERATURE ON THE VISCOSITY

The viscosity of liquids decrease with increase in temperature and increase with the decrease in temperature.

That is, $\eta \propto \frac{1}{\sqrt{T}}$. On the other hand, the value of viscosity of gases increases with the increase in temperature

and vice-versa. That is, $\eta \propto \sqrt{T}$.

STOKE'S LAW

Stokes proved that the viscous drag (F) on a spherical body of radius r moving with velocity v in a fluid of viscosity η is given by $F = 6\pi\eta r v$. This is called Stokes' law.


TERMINAL VELOCITY

When a body is dropped in a viscous fluid, it is first accelerated and then its acceleration becomes zero and it attains a constant velocity called terminal velocity.

Calculation of Terminal Velocity

Let us consider a small ball, whose radius is r and density is ρ , falling freely in a liquid (or gas), whose density is σ and coefficient of viscosity η . When it attains a terminal velocity v. It is subjected to two forces :

- (i) effective force acting downward
 $= V (\rho - \sigma) g = \frac{4}{3} \pi r^3 (\rho - \sigma) g,$
- (ii) viscous force acting upward
 $= 6 \pi \eta r v.$



Since the ball is moving with a constant velocity v i.e., there is no acceleration in it, the net force acting on it must be zero. That is

$$6\pi \eta r v = \frac{4}{3} \rho r^3 (\rho - \sigma) g$$

or
$$v = \frac{2}{9} \frac{r^2 (\rho - \sigma) g}{\eta}$$

Thus, terminal velocity of the ball is directly proportional to the square of its radius

Important point

Air bubble in water always goes up. It is because density of air (ρ) is less than the density of water (σ). So the terminal velocity for air bubble is Negative, which implies that the air bubble will go up. Positive terminal velocity means the body will fall down.

Illus. 18.

A spherical ball is moving with terminal velocity inside a liquid. Determine the relationship of rate of heat loss with the radius of ball.

Sol.

Rate of heat loss = power = $F \times v = 6 \pi \eta r v \times v = 6 \pi \eta r v^2 = 6 \rho \eta r \left[\frac{2}{9} \frac{g r^2 (\rho_0 - \rho_l)}{\eta} \right]^2$

Rate of heat loss $\propto r^5$

Illus. 19.

A drop of water of radius 0.0015 mm is falling in air. If the coefficient of viscosity of air is $1.8 \times 10^{-5} \text{ kg/(m-s)}$, what will be the terminal velocity of the drop? (density of water = $1.0 \times 10^3 \text{ kg/m}^3$ and $g = 9.8 \text{ N/kg}$.) Density of air can be neglected.

Sol.

By Stoke's law, the terminal velocity of a water drop of radius r is given by

$$v = \frac{2}{9} \frac{r^2 (\rho - \sigma) g}{\eta}$$

where ρ is the density of water, σ is the density of air and η the coefficient of viscosity of air. Here σ is negligible and $r = 0.0015 \text{ mm} = 1.5 \times 10^{-3} \text{ mm} = 1.5 \times 10^{-6} \text{ m}$. Substituting the values :

$$v = \frac{2}{9} \times \frac{(1.5 \times 10^{-6})^2 \times (1.0 \times 10^3) \times 9.8}{1.8 \times 10^{-5}}$$

$$= 2.72 \times 10^{-4} \text{ m/s}$$

Illus. 20.

A metallic sphere of radius $1.0 \times 10^{-3} \text{ m}$ and density $1.0 \times 10^4 \text{ kg/m}^3$ enters a tank of water, after a free fall through a distance of h in the earth's gravitational field. If its velocity remains unchanged after entering water, determine the value of h . Given : coefficient of viscosity of water = $1.0 \times 10^{-3} \text{ N-s/m}^2$, $g = 10 \text{ m/s}^2$ and density of water = $1.0 \times 10^3 \text{ kg/m}^3$.

Sol.

The velocity attained by the sphere in falling freely from a height h is

$$v = \sqrt{2gh} \quad \dots(i)$$

This is the terminal velocity of the sphere in water. Hence by Stoke's law, we have

$$v = \frac{2}{9} \frac{r^2(\rho - \sigma)g}{\eta}$$

where r is the radius of the sphere, ρ is the density of the material of the sphere
 σ (= 1.0 × 10³ kg/m³) is the density of water and η is coefficient of viscosity of water.


$$\therefore v = \frac{2 \times (1.0 \times 10^{-3})^2 (1.0 \times 10^4 - 1.0 \times 10^3) \times 10}{9 \times 1.0 \times 10^{-3}} = 20 \text{ m/s}$$

from equation (i), we have

$$h = \frac{v^2}{2g} = \frac{20 \times 20}{2 \times 10} = 20 \text{ m}$$

Applications of Stokes' Formula

- (i) **In determining the Electronic Charge by Millikan's Experiment** : Stokes' formula is used in Millikan's method for determining the electronic charge. In this method the formula is applied for finding out the radii of small oil-drops by measuring their terminal velocity in air.
- (ii) **Velocity of Rain Drops** : Rain drops are formed by the condensation of water vapour on dust particles. When they fall under gravity, their motion is opposed by the viscous drag in air. As the velocity of their fall increases, the viscous drag also increases and finally becomes equal to the effective force of gravity. The drops then attain a (constant) terminal velocity which is directly proportional to the square of the radius of the drops. In the beginning the raindrops are very small in size and so they fall with such a small velocity that they appear floating in the sky as cloud. As they grow in size by further condensation, then they reach the earth with appreciable velocity,
- (iii) **Parachute** : When a soldier with a parachute jumps from a flying aeroplane, he descends very slowly in air.



In the beginning the soldier falls with gravity acceleration g, but soon the acceleration goes on decreasing rapidly until in parachute is fully opened. Therefore, in the beginning the speed of the falling soldier increases somewhat rapidly but then very slowly. Due to the viscosity of air the acceleration of the soldier becomes ultimately zero and the soldier then falls with a constant terminal speed. In Fig graph is shown between the speed of the falling soldier and time.